


材料和技术参数(Material&Technical data):

- 金属件(Metallic parts): 锌合金(Zinc alloy)
- 接触件(Contact): 铜镀金(Copper plated)
- 插芯材质(Core insert material): TPU
- 密封件材质(Seal material): NBR
- 包胶体(Encapsulated colloid): TPU
- 电缆护套(Cable jacket): PVC/PUR
- 电缆号(Cable number): 210/220/610/620/630/150/050
- 额定电压(Rated voltage): 24V DC
- 额定电流(Rated current)(40° C): max.3A
- 温度范围(Temperature range): -25...+80° C
- 防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)

接线图:
Circuit Diagram:

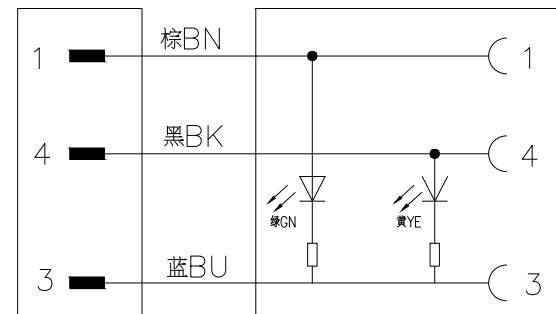

- When plugged and screwed down
- 执行标准(Executive standard): IEC 61076-2-104
- 导体横截面(CSA): 3x0.25mm²(23AWG)
- 绝缘电阻(Insulation resistance): ≥100MΩ
- 接触电阻(Touch resistance): ≤5mΩ
- 可插拔次数(Number of pluggable times): ≥ 100

SIGN	REVISION	NAME	DATE

MATERIAL : SEE TABLE	
FINISH : SEE TABLE	
DRAWN BY:	CHK'D BY:
APP'D BY :	SCALE : 1 : 1
SHEET 1 OF 1	UNIT : mm
DATE :	DAN :

兴威联电气
—SVLEC—

TITLE: M8-3P 双端预铸直型公插转弯角带灯母插

DWG. NO.: 988041-XXX-L REV AX

DIMENSION CLASSIFICATION

