



材料和技术参数(Material&Technical data):

- 金属件(Metallic parts): 锌合金(Zinc alloy)
- 接触件(Contact): 铜镀金(Copper plated)
- 插芯材质(Core insert material): PA
- 密封件材质(Seal material): NBR
- 包胶体(Encapsulated colloid): TPU Black
- 电缆护套(Cable jacket): PVC 黑色Black
- 电缆号(Cable number): 612
- 额定电压(Rated voltage): 30V DC
- 额定脉冲电压(Rated pulse voltage): 800V
- 额定电流(Rated current)(40°C): max.3A
- 温度范围(Temperature range): -25...+80°C
- 防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)
When plugged and screwed down
- 执行标准(Executive standard): IEC 61076-2-104
- 导体横截面(CSA): 2*0.34+3*0.14mm²
- 绝缘电阻(Insulation resistance): ≥100MΩ
- 接触电阻(Touch resistance): ≤5mΩ
- 可插拔次数(Number of pluggable times): ≥ 100

接线图:

Circuit Diagram:

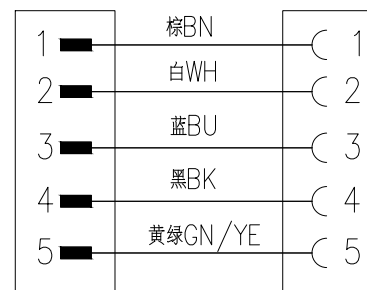

				MATERIAL : SEE TABLE		兴威联电气 — SVLEC —
				FINISH : SEE TABLE		
SIGN		REVISION		DRAWN BY:	CHK'D BY:	
				APP'D BY :	SCALE : 1 : 1	TITLE: M8-5P双端预铸B扣公插转母插
				SHEET 1 OF 1	UNIT : mm	DWG. NO.: 988102-612-L
				DATE :	DAN :	REV AX
DIMENSION CLASSIFICATION						

8 7 6 5 4 3 2 1

E

E

D

D

C

C

B

B

A

A

8 7 6 5 4 3 2 SVL\P\M8