


材料和技术参数(Material&Technical data):

- 金属件(Metallic parts): 锌合金(Zinc alloy)
- 接触件(Contact): 铜镀金(Copper plated)
- 插芯材质(Core insert material): TPU
- 密封件材质(Seal material): NBR
- 胶体(Encapsulated colloid): TPU Black
- 电缆护套(Cable jacket): PVC 黑色Black
- 电缆号(Cable number): 290
- 额定电压(Rated voltage): 30V DC
- 额定脉冲电压(Rated pulse voltage): 800V
- 额定电流(Rated current)(40°C): max.1.5A
- 温度范围(Temperature range): -25...+80°C
- 防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)
When plugged and screwed down
- 执行标准(Executive standard): IEC 61076-2-104
- 导体横截面(CSA): 6*0.25mm²
- 绝缘电阻(Insulation resistance): ≥100MΩ
- 接触电阻(Touch resistance): ≤5mΩ
- 可插拔次数(Number of pluggable times): ≥ 100

接线图:

Circuit Diagram:

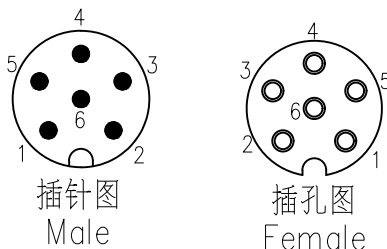

1	棕BN	1
2	白WH	2
3	蓝BU	3
4	黑BK	4
5	灰GY	5
6	粉PK	6

				MATERIAL : SEE TABLE		兴威联电气 — SVLEC —					
				FINISH : SEE TABLE							
SIGN		REVISION		NAME		DATE		DRAWN BY:	CHK'D BY:	TITLE: M8-6P双端预铸公插转母插	
DIMENSION CLASSIFICATION				DATE :		APP'D BY :		SCALE : 1 : 1			
						SHEET 1 OF 1		UNIT : mm			
						DATE :		DAN :			DWG. NO.: 988103-XXX-L

兴威联电气
— SVLEC —

TITLE: M8-6P双端预铸公插转母插

DWG. NO.: 988103-XXX-L

REV
AX

SVL\P\M8