


材料和技术参数(Material&Technical data):

- 金属件(Metallic parts): 锌合金(Zinc alloy)
- 接触件(Contact): 铜镀金(Copper plated)
- 插芯材质(Core insert material): TPU
- 密封件材质(Seal material): NBR
- 包胶体(Encapsulated colloid): TPU Black
- 电缆护套(Cable jacket): PVC 黑色Black
- 电缆号(Cable number): 293
- 额定电压(Rated voltage): 30V DC
- 额定脉冲电压(Rated pulse voltage): 800V
- 额定电流(Rated current)(40° C): max.1.5A
- 温度范围(Temperature range): -25...+80° C
- 防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)
When plugged and screwed down
- 执行标准(Executive standard): IEC 61076-2-104
- 导体横截面(CSA): 8*0.25mm²
- 绝缘电阻(Insulation resistance): ≥100MΩ
- 接触电阻(Touch resistance): ≤5mΩ
- 可插拔次数(Number of pluggable times): ≥ 100

接线图:

Circuit Diagram:

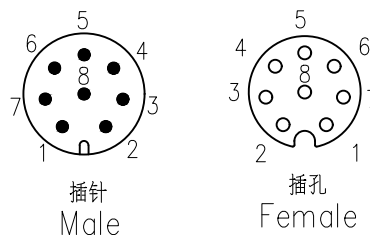

1	白WH	⌋ 1
2	棕BN	⌋ 2
3	绿GN	⌋ 3
4	黄YE	⌋ 4
5	灰GY	⌋ 5
6	粉PK	⌋ 6
7	蓝BU	⌋ 7
8	红RD	⌋ 8

				MATERIAL : SEE TABLE		兴威联电气 — SVLEC —
				FINISH : SEE TABLE		
SIGN	REVISION	NAME	DATE	DRAWN BY: WYL	CHK'D BY:	TITLE: M8-8P 双端预铸公插转母插
DIMENSION CLASSIFICATION				APP'D BY:	SCALE : 1 : 1	DWG. NO.: 988104-XXX-L
				SHEET 1 OF 1	UNIT : mm	
				DATE :	DAN :	

兴威联电气
— SVLEC —

TITLE: M8-8P 双端预铸公插转母插

DWG. NO.: 988104-XXX-L

REV
AX