



材料和技术参数(Material&Technical data):

金属件(Metallic parts): 锌合金(Zinc alloy)  
 接触件(Contact): 铜镀金(Copper plated)  
 插芯材质(Core insert material): TPU  
 密封件材质(Seal material): NBR  
 包胶体(Encapsulated colloid): TPU Black  
 电缆护套(Cable jacket): PVC/PUR  
 电缆号(Cable number): 210/220/610/620/630/150/050  
 额定电压(Rated voltage): 50V AC/60V DC  
 额定脉冲电压(Rated pulse voltage): 1500V  
 额定电流(Rated current)(40°C): max.4A  
 温度范围(Temperature range): -25...+80°C  
 防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)  
 When plugged and screwed down  
 执行标准(Executive standard): IEC 61076-2-104/101  
 导体横截面(CSA):  $3 \times 0.25\text{mm}^2$  (23AWG)  
 绝缘电阻(Insulation resistance):  $\geq 100\text{M}\Omega$   
 接触电阻(Touch resistance):  $\leq 5\text{m}\Omega$   
 可插拔次数(Number of pluggable times):  $\geq 100$

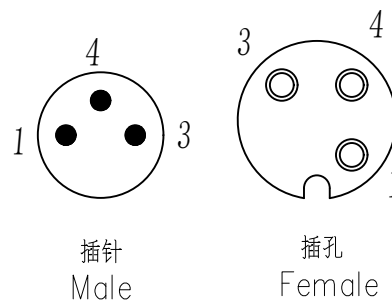

接线图:  
Circuit Diagram:

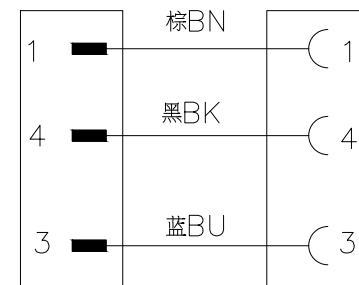

				MATERIAL : SEE TABLE		<b>兴威联电气</b> <b>—SVLEC—</b>	
				FINISH : SEE TABLE			
SIGN		REVISION		DRAWN BY:		CHK'D BY:	
				APP'D BY :		SCALE : 1 : 1	
				SHEET 1 OF 1		UNIT : mm	
				DATE :		DAN :	
DIMENSION CLASSIFICATION						TITLE: 3芯双端预铸直型M8公插转M12母插	
						DWG. NO.: 988241-XXX-L	
						REV AX	

兴威联电气  
—SVLEC—

TITLE: 3芯双端预铸直型M8公插转M12母插

DWG. NO.: 988241-XXX-L

REV  
AX

SVL\P\M8-M12