



材料和技术参数(Material&Technical data):

- 金属件(Metallic parts): 锌合金(Zinc alloy)
- 接触件(Contact): 铜镀金(Copper plated)
- 插芯材质(Core insert material): TPU
- 密封件材质(Seal material): NBR
- 包胶体(Encapsulated colloid): TPU Black
- 电缆护套(Cable jacket): PVC/PUR
- 电缆号(Cable number): 211/221/611/621/631/151/051/174
- 额定电压(Rated voltage): 50V AC/60V DC
- 额定脉冲电压(Rated pulse voltage): 1500V
- 额定电流(Rated current)(40° C): max.4A
- 温度范围(Temperature range): -25...+80° C
- 防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)

- When plugged and screwed down
- 执行标准(Executive standard): IEC 61076-2-104/101
- 导体横截面(CSA): $4 \times 0.25\text{mm}^2$ (23AWG)
- 绝缘电阻(Insulation resistance): $\geq 100\text{M}\Omega$
- 接触电阻(Touch resistance): $\leq 5\text{m}\Omega$
- 可插拔次数(Number of pluggable times): ≥ 100

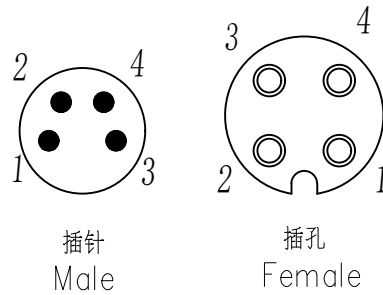

接线图:
Circuit Diagram:

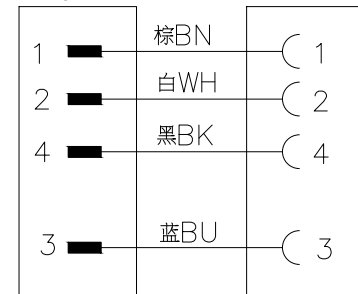

				MATERIAL : SEE TABLE		兴威联电气 — SVLEC —
				FINISH : SEE TABLE		
SIGN	REVISION	NAME	DATE	DRAWN BY:	CHK'D BY:	TITLE: 4芯双端预铸直型M8公插转M12母插
DIMENSION CLASSIFICATION				APP'D BY :	SCALE : 1 : 1	DWG. NO.: 988251-XXX-L
				SHEET 1 OF 1	UNIT : mm	
				DATE :	DAN :	SVL\P\M8