

材料和技术参数(Material&Technical data):

金属件(Metallic parts): 锌合金(Zinc alloy)

接触件(Contact): 铜镀金(Copper plated)

插芯材质(Core insert material): TPU

密封件材质(Seal material): NBR

包胶体(Encapsulated colloid): TPU

电缆护套(Cable jacket): PVC/PUR

电缆号(Cable number): 211/221/611/621/631/151/051/174

额定电压(Rated voltage): 24V DC

额定电流(Rated current)(40° C): max.3A

温度范围(Temperature range): -25...+80° C

防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)

When plugged and screwed down


执行标准(Executive standard): IEC 61076-2-104/101

导体横截面(CSA): 4x0.25mm<sup>2</sup>(23AWG)

绝缘电阻(Insulation resistance): ≥100MΩ

接触电阻(Touch resistance): ≤5mΩ

可插拔次数(Number of pluggable times): ≥ 100

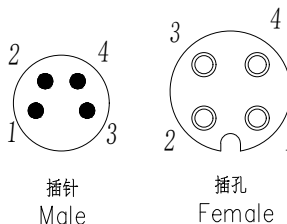


插针  
Male

插孔  
Female

接线图:

Circuit Diagram:

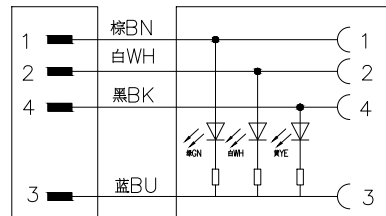

SIGN	REVISION	NAME	DATE
DIMENSION CLASSIFICATION			

MATERIAL : SEE TABLE

FINISH : SEE TABLE

DRAWN BY: CHK'D BY:

APP'D BY: SCALE : 1 : 1

SHEET 1 OF 1 UNIT : mm

DATE : DAN :

**兴威联电气**  
**—SVLEC—**

TITLE: 4芯双端预铸M8直型公插转M12弯角带灯母插

DWG. NO.: 988291-XXX-L

REV

AX

SVL\p\M8-M12